


ADIY N58 LTE GNSS Bluetooth Evaluation Board

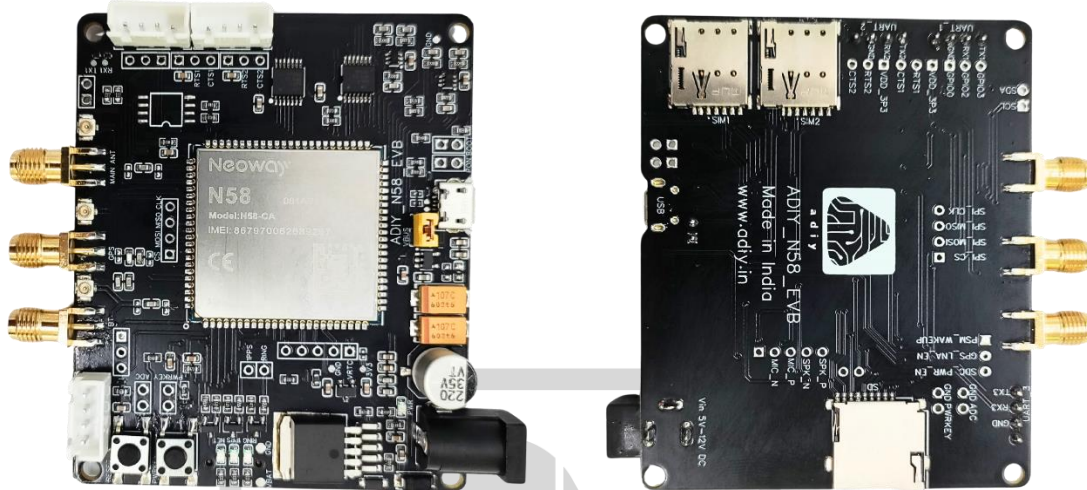

Description:

Neoway N58 is ideal solution for M2M and IoT applications N58 is an industrial LTE module that is developed based on the UNISOC UIS8910DM platform. This module supports GSM, FDD-LTE (Cat 1), and TDD-LTE (Cat 1) network modes. It provides a variety of hardware interfaces, supports audio and video functions, Wi-Fi positioning, BT/BLE, and GNSS (optional), suitable for developing IoT communications devices such as wireless meter reading terminal, in-vehicle device, potable POS device and industrial router.

This module has excellent RF performance, and it supports low power consumption and ultra-wide operating temperature range. N58 integrates various network protocols and provides industry-standard interfaces. With abundant functionalities and USB serial drivers for Windows 7/8/8.1/10, Linux, and Android, N58 is an optimal option for energy metering, telematics, industrial router, industrial PAD, video surveillance, environmental monitoring, etc.

Main Features:

- ARM Cortex-A5 processor, 500 MHz CPU clock speed, 32 KB L1 cache
- Supported network modes: GSM/GPRS<E Cat 1
- Supports USB2.0/USIM/ADC/UART/SDIO/SPI/I2C/GNSS (optional)

Basic Features:

- Supports USB2.0/USIM/ADC/UART/SDIO/SPI/I2C/GNSS (optional)
- Input power supply 5V to 12V DC 2A
- Operating current
 - Sleep mode2): < 3 mA
 - Idle mode3): < 16 mA
 - Operating mode4) (LTE mode): < 600 mA
- Application processor ARM Cortex-A5 processor, 500 MHz main frequency, 32 KB L1 cache
- Memory
 - RAM: 128 Mb
 - ROM: 64 Mb
- Wireless rate
 - GPRS: Max 85.6 kbps (DL)/Max 85.6 kbps (UL)
 - FDD-LTE: Cat 1, Max 10 Mbps (DL)/Max 5 Mbps (UL)
 - TDD-LTE: Cat 1, Max 8 Mbps (DL)/Max 2 Mbps (UL)
- Data rate
 - LTE: CAT1, Max. 10Mbit/s (DL)/Max. 5Mbit/s(UL)
 - GPRS: Max. 85.6 Kbit/s(DL) / Max. 85.6 Kbit/s(UL)
- Application interface
 - 2G/4G antenna, GNSS antenna, BT antenna. The characteristic impedance of each antenna is 50 Ω .
 - Three UART interfaces,
 - One USB2.0 high-speed interface
 - One SPI interfaces.
 - Four GPIOs with interrupt
 - One 10-bit ADC interface, detectable voltage ranging
 - One SDIO interface, used for an SD card.

- One 1PPS interface.
- One I2C interface, supporting only the master mode.
- One audio input and one audio output
- Dual-USIM-single-standby (Optional)
- Firmware Over-the-Air (FOTA)
- Vo-LTE
- MCU software OTA*
- Bluetooth 4.2 / BLE Wi-Fi SCAN
- Open CPU
- AT command
 - 3GPP Release 13
 - Neoway extended commands
- SMS (PDU, TXT)
- Data (PPP, RNDIS, ECM)
- Network Protocols (TCP, UDP, MQTT, FTP, HTTP/HTTPS, SSL, TLS)
- USB drivers
 - Windows 7/8/8.1/10
 - Linux 2.6~4.4
 - Android 4.x/5.x/6.x/7.x/8.x
- RIL Driver (Android 4.x/5.x/6.x/7.x/8.x)

GNSS Features:

- Receiving Bands:
 - GPS L1 C/A: 1574.397MHz -1576.443MHz
 - BDS B1 C/A: 1559.052MHz -1563.144MHz
- Receiver type
 - 32 tracking / 32 acquisition-channel
 - GNSS receiver

- Accuracy position: <3m (CEP50)
- Data update rate 1 to 10Hz,Typ: 1Hz
- Sensitivity (Typical)
 - Tracking: -160dbm
 - Reacquisition: -154dbm
 - Coldling: -146dbm

Pin Description:

ADIY N58 LTE GNSS Bluetooth Evaluation Board

